

# RESIDENTIAL




Hubbell has taken its expertise in providing quality commercial telecommunications products, and has developed a reliable, innovative solution for the home and small office environment. **NETSELECT**® cabling solution products satisfy the need for a fast, dependable, yet flexible system to accommodate today's changing voice, data and video requirements.



# netSELECT® Advantages and Wiring Layout

Today's Communications Entail A Lot More Than Just Talking

NETSELECT® Keeps You Connected—Internet, Voice, Data and Entertainment

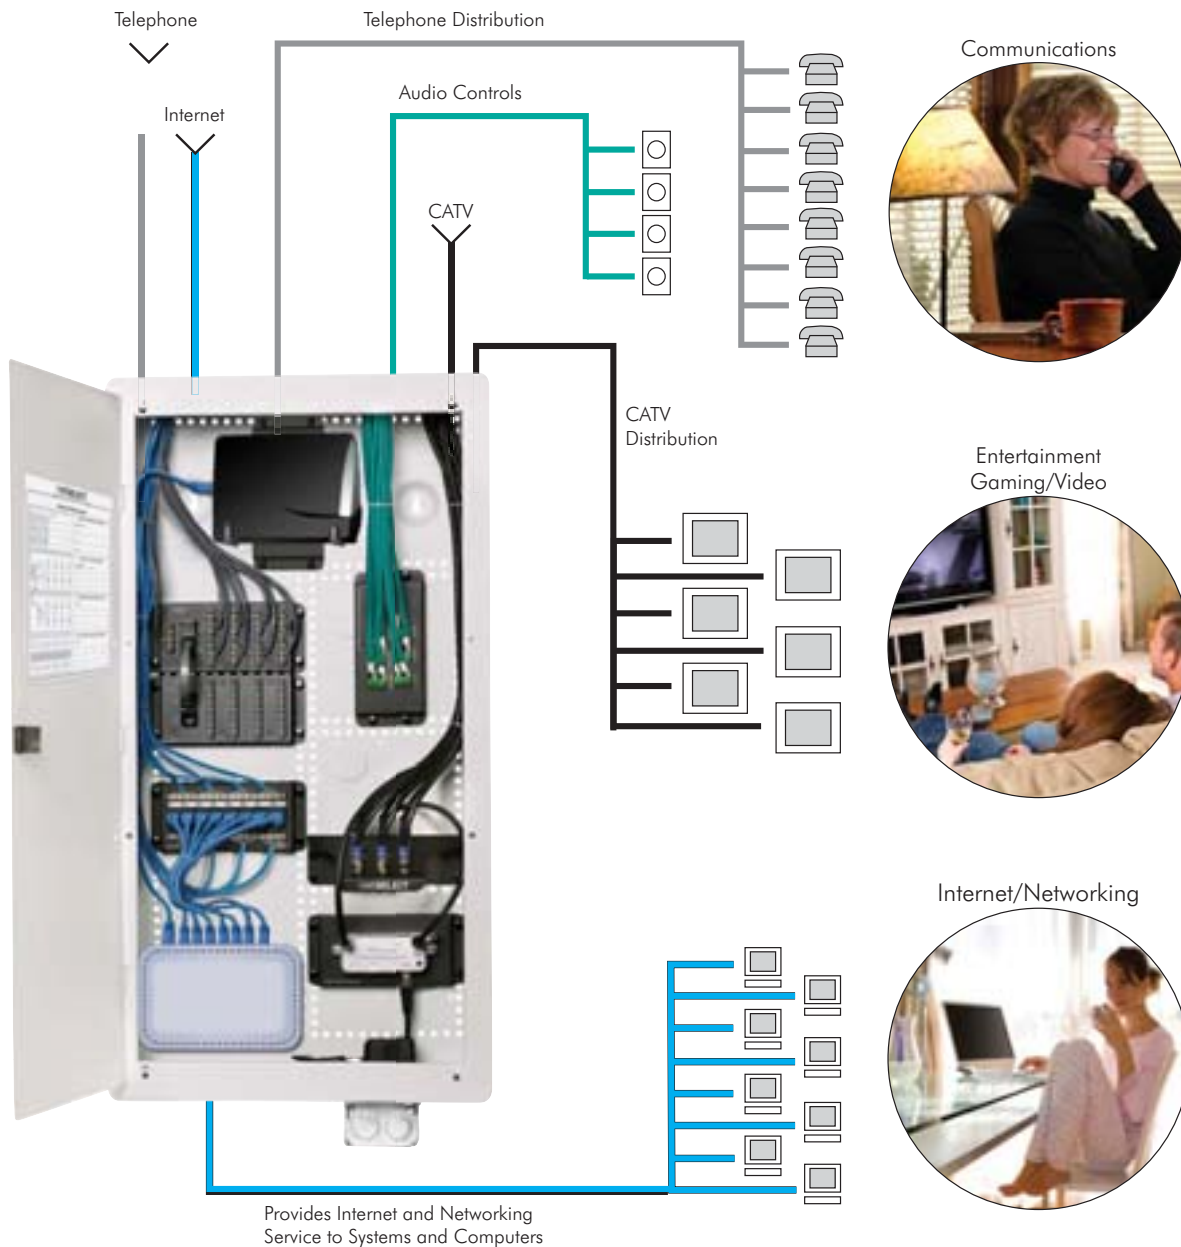

## HUBBELL Advantage

- High-Performance Connectivity with Uncompromising Aesthetics.
- Modular System Makes Custom Configurations Effortless.
- Supports Single Family, High Rise MDU, Small Office, and Hospitality Applications.
- Packaging Materials Minimized to Simplify Job Site Clean-Up.



### Features/Benefits

- Flush or surface mount enclosure (hardware provided).
- Hinged cover can be mounted to swing from either side.
- Integral trim ring on hinged cover hides rough-in hole in sheet rock.
- Horizontal and vertical module mounting holes for maximum flexibility.
- Unique 89D bracket mounting holes allow easy mounting of 66 blocks and peripherals (excluding 10" enclosure).
- Provisions to mount optional duplex power in 10"+ enclosure and lock kit available.
- Integral cable management slots and tie-wraps provided to help dress cable runs.
- Additional nylon push pins provided to assist module mounting.
- Material: 20-18 gauge Steel.
- Finish: white, powder coat.
- UL and cULus Listed UL 1863.

### NETSELECT® Network Enclosures

#### 10" Network Enclosure for MDU and Modular Applications



NSOBX10

Dimensions: 14.38"W x 10"H x 3.96"D.  
 Knockouts:  
 Top: four 1½" N.P.T. or completely open combo;  
 Bottom: four 1½" N.P.T. or completely open combo;  
 Side: 1½" N.P.T.

Description	Catalog No.
10" Enclosure with Hinged Cover	<b>NSOBX10</b>
10" Enclosure with Panel Cover	<b>NSOBX10BC</b>
10" Enclosure Box only	<b>NSOBX10B</b>
Hinged Door	<b>NSOBX10D</b>
Panel Cover	<b>NSOBX10C</b>

#### 14" Network Enclosure



NSOBOX14

Dimensions: 14.38"W x 14"H x 3.96"D.  
 Knockouts:  
 Top: two 1" Dia. and three 1½" N.P.T. combo;  
 Bottom: one 1" Dia. and one 1½" N.P.T. combo;  
 1 Power kit knockout;  
 Back: two 1" N.P.T.

Description	Catalog No.
14" Enclosure with Hinged Cover	<b>NSOBOX14</b>
14" Enclosure with Panel Cover	<b>NSOBOX14BC</b>
14" Enclosure Box only	<b>NSOBOX14B</b>
Hinged Door	<b>NSOBOX14D</b>
Panel Cover	<b>NSOBOX14C</b>
2"D Extension Bracket with ventilation and WiFi KOs	<b>NSOBOX14X2</b>

#### Pre-Configured Network Enclosure 14"H with Hinged Cover



Pre-configured Network System  
 Basic home network kit includes:  
 1 box with hinged cover (NSOBOX14),  
 1 primary 8-port telephone module (NSOPTM8),  
 1 4-way coaxial splitter module (NSOVDM4)  
 Catalog No. **NSOBNK14**

#### 28" and 48" Network Enclosure



NSOBOX28

##### 28" Enclosure

Dimensions: 14.38"W x 28"H x 3.96"D.  
 Knockouts:  
 Top: five 1½" N.P.T.;  
 Bottom: two power kit knockouts;  
 Back: four 1" N.P.T.

##### 48" Enclosure

Dimensions: 14.38"W x 48"H x 3.96"D.  
 Knockouts:  
 Top: five 1½" N.P.T.;  
 Bottom: two power kit knockouts;  
 Back: none.

Description	Catalog No.
28" Enclosure with Hinged Cover	<b>NSOBOX28</b>
28" Enclosure with Panel Cover	<b>NSOBOX28BC</b>
28" Enclosure Box only	<b>NSOBOX28B</b>
Hinged Door	<b>NSOBOX28D</b>
Panel Cover	<b>NSOBOX28C</b>
2"D Extension Bracket with ventilation and WiFi KOs	<b>NSOBOX28X2</b>
48" Enclosure with Hinged Cover	<b>NSOBOX48</b>

#### Power Kits



NSOKPS

##### Standard Power Kit

Includes duplex receptacle 15A 125V, NEMA 5-15R, electrical steel box and wall plate.  
 Catalog No. **NSOKP\***

##### Surge Suppression Power Kit

Includes duplex receptacle 15A 125V, NEMA 5-15R, 240 Joules/15,000A protection per mode, electrical steel box and wall plate.  
 Catalog No. **NSOKPS\***

#### Lock Kit, Chromed Steel



Includes two keys. Eliminates unwanted tampering.  
 Catalog No. **FLOCK1\***

#### WiFi Antenna Kit



Attaches to extension brackets. 7dB gain for better coverage.  
 Catalog No. **NSOKA\***  
 \*Not UL, not cULus Listed.

# netSELECT® Modules

## NETSELECT® Network Modules

NETSELECT® modular components enable the designer to select performance requirements specifically for the application. Modules snap horizontally or vertically into the enclosures for maximum flexibility and optimum space usage.

### Specifications

- ◆ Dimensions: 6.47"W x 2.95"H, except NSOMTM24: 6.47"W x 6.0"H.
- ◆ Meets FCC Part 68 standard.
- ◆ Finish: black, powder coat.
- ◆ Material: 18 gauge Steel or high impact plastic.
- ◆ UL and cULus Listed UL 1863.
- ◆ T-568A wiring.

### Combo Module, 6-port

6-Port Telephone Panel and 6-Port Coaxial Splitter with Optional 6-Port Cat. 5e Panel Provides voice, video, and data distribution. Perfect for use with NSOBOX10 and NS790xx plates to quickly establish a comprehensive home network.



Description	Catalog No.
Telephone and Video	<b>NSOTVM6</b>
Telephone, Video and Cat 5e	<b>NSOTVDM6</b>
Cat 5e Data Upgrade Kit	<b>NSODK6</b>

### Data Module, 8-port

**Category 5e Data Module, 8-Port**  
Supports up to 8 data lines with front 110 punch-down terminations.



**Category 6 Data Module, 8-Port**  
Supports enhanced transmission speeds beyond gigabit ethernet.

Description	Catalog No.
Category 5e Data Module	<b>NSODM8</b>
Category 6 Data Module	<b>NSODM8C6</b>

### Primary Telephone Module, 8-port

Supports 8 phone outlets with up to 4 incoming lines for voice. RJ31X interface jack included for security system connection. RJ45 jack interfaces with optional NSOETM8 Telephone Expansion module for additional extensions.



Description	Catalog No.
Primary Telephone Module, 8-port	<b>NSOPTM8</b>

### Multiport Patchable Telecom Module

Terminates lines via modular plug to accommodate flexibility, by changing plug locations. Reconfigure where phone lines go at the panel level. Includes nine RJ45 jumper cords.



Description	Catalog No.
Multiport Patchable Telecom Module	<b>NSOMTM24</b>

### Expansion Telephone Module, 8-port

Adds an additional 8 phone outlets with up to 4 incoming lines when used with the primary telephone module. Includes RJ45 jumper cord to connect with NSOPTM8 Primary Telephone module.



Description	Catalog No.
Expansion Telephone Module, 8-port	<b>NSOETM8</b>

### Combination Module, 6-port Telephone and 1-port Data

Provides basic telephone and data delivery in a small package. Allows data lines to be converted to voice, with the move of a patch cord.



Description	Catalog No.
Combo Module, 6-port Telephone/1-port Data	<b>NSO6P1DM</b>

### Blank Module Plate

Allows mounting of active components (i.e. switches, routers) or other devices (66 blocks, audio components) onto a modular platform. Can be custom drilled or used with two self-adhesive VELCRO® strips included to mount components onto module.



Description	Catalog No.
Blank Module Plate	<b>NSOBM</b>

VELCRO® is a registered trademark of Velcro Industries B.V.

**NETSELECT® Audio Video Modules**

NETSELECT® Audio Video Modules support bidirectional signal by splitting to 4, 6, or 8 separate work areas. Pre-mounted push pins snap the module quickly into place.

**Specifications**

- ◆ Dimensions 4- and 6-way: 6.47"W x 2.95"H.
- ◆ Dimensions 8-way: 6.47"W x 2.09"H , 3.2"D.
- ◆ Finish: black, powder coat.
- ◆ UL and cULus Listed UL 1863.

**4-Way Coaxial Splitter Modules**

One Incoming Line, Four Outgoing.



Description	Catalog No.
1 Ghz, Basic Unit	<b>NSOVM4</b>
2.3 Ghz, Enhanced Capability	<b>NSOVM42G</b>

**6-Way Coaxial Splitter Modules**

One Incoming Line, Six Outgoing.



Description	Catalog No.
1 Ghz, Basic Unit	<b>NSOVM6</b>
2.3 Ghz, Enhanced Capability	<b>NSOVM62G</b>

**8-Way Coaxial Splitter Modules**

One Incoming Line, Eight Outgoing.



Description	Catalog No.
1 Ghz, Basic Unit	<b>NSOVM8</b>
2.3 Ghz, Enhanced Capability	<b>NSOVM82G</b>

**Fixed Video Amplifier Module, 10dB**

Provides video signal amplification for incoming cable feeds recommended for use when more than four outputs are installed or when signal level is low. Provides 10dB forward path gain and supports current digital cable systems and modems with a passive return. Includes RG-59 cable jumper to connect amplifier to passive video splitter.



Description	Catalog No.
120 volt rated	<b>NSOVAMP</b>

**8 Room Audio Module**

Distributes audio from an amplifier to matching volume controllers. Supports up to eight rooms of audio. Power handling - 200W RMS@20° C per channel. Requires impedance matching volume controls, see below.



Description	Catalog No.
8 Room Audio Module	<b>NSOAM8</b>

**NETSELECT® Accessories**

**Audio Volume Controllers**

Decorator Styling (NSOSAVC). Power handling - 70W RMS@20° C. Impedance matching for up to 8 pairs of speakers. Includes both ivory and white slides/knobs and frames.

Description	Catalog No.
Slide Controller, Ivory/White	<b>NSOSAVC</b>
Rotary Controller, Ivory/White	<b>NSORAVC</b>



**Adapter Panels**

Description	Catalog No.
<b>Panel Bracket Adapter</b> For use with Adapter Panels shown below, and FSP series modules, see page F8. Snap mounts into structured cabling enclosures.	<b>NSOFSB</b>
<b>F-Connector Adapter Panel</b> Includes 6 populated coaxial connectors.	<b>FSPFP6X</b>
<b>Keystone Adapter Panel</b> Includes 6 blank openings for modular jacks and AV connectors.	<b>FSPHD6X</b>



# netSELECT® Multimedia Connectors



## Modular Voice/Data Jacks

netSELECT® Voice/Data Jacks provide for a wide range of applications ranging from high performance data demands of Category 6 and Category 5e, to voice grade jacks.

### Specifications

- ◆ Easy to terminate angled wiring towers.
- ◆ Meets FCC part 68.
- ◆ Exceeds TIA Category 6 and Category 5e standards.
- ◆ UL Listed and CSA Certified.



NSJ6W

Color	Category 6 Catalog No.	Category 6 Bag of 25 Catalog No.	Category 5e Catalog No.	Category 5e Bag of 25 Catalog No.	USOC Catalog No.
See below	<b>NSJ6XX</b>	<b>NSJ6XX25</b>	<b>NSJ5EXX</b>	<b>NSJ5EXX25</b>	<b>NSJUXX</b>

### XX = Jack Color Options

AL=Almond	BK=Black	B=Blue	GY=Gray	GN=Green	I=Ivory
LA=Light Almond	OR=Orange	R=Red	W=White	Y=Yellow	

## F-Connector, Nickel, F/F Coupler



Housing Color	Almond	Black	Electric Ivory	Gray
Catalog No.	<b>NSF70AL</b>	<b>NSF70BK</b>	<b>NSF70I</b>	<b>NSF70GY</b>
Housing Color	Light Almond	White		
Catalog No.	<b>NSF70LA</b>	<b>NSF70W</b>		



## Universal Patch Cords, Category 6 and Category 5e

netSELECT® Patch Cords allow for quick change of voice/data lines with insertion of modular plugs.

### Specifications

- ◆ Exceeds TIA Category 6 and Category 5e standards.
- ◆ UL Listed and cUL Certified.



Description	Black Catalog No.	Blue Catalog No.	Gray Catalog No.	Green Catalog No.	Red Catalog No.	Yellow Catalog No.
Category 6	<b>SC6BK**</b>	<b>SC6B**</b>	<b>SC6GY**</b>	<b>SC6GN**</b>	<b>SC6R**</b>	<b>SC6Y**</b>
Category 5e	<b>SC5EBK**</b>	<b>SC5EB**</b>	<b>SC5EGY**</b>	<b>SC5EGN**</b>	<b>SC5ER**</b>	<b>SC5EY**</b>

\*\*=Length: '01'=1 foot; '03'=3 feet; '05'=5 feet; '07'=7 feet; '10'=10 feet; '15'=15 feet; '20'=20 feet; '25'=25 feet.

**NOTE:** Additional colors and lengths are available. Please contact Customer Service.



## Universal Patch Panels, Category 6 and Category 5e

netSELECT® Patch Panels are excellent for designing rack systems for telephone, data and AV systems. Consolidation Blocks are ideal for smaller user count configurations that mount in or on the wall.

### Specifications

- ◆ Exceeds TIA Category 6 and Category 5e standards.
- ◆ UL Listed and cUL Certified.



NS612U

Patch Panels, Universal, 89D Bracket Category 5e, 12-port, Wall Mount	Patch Panels, Universal, 89D Bracket Category 6, 12-port, Wall Mount
Catalog No. <b>NS5E12U</b>	<b>NS612U</b>



NS624U

Size	Universal Patch Panel Category 5e	Universal Patch Panel Category 6
24-port/1.75"H/1 Rack Unit	<b>NS5E24U</b>	<b>NS624U</b>
48-port/3.50"H/2 Rack Units	<b>NS5E48U</b>	<b>NS648U</b>



NS648U



# netSELECT® Multimedia Plates and Frames



## Decorator Wall Plates

### Standard, Nylon

	1-Gang	2-Gang	3-Gang	4-Gang	5-Gang	6-Gang
See Color Code	<b>NP26XX</b>	<b>NP262XX</b>	<b>NP263XX</b>	<b>NP264XX</b>	<b>NP265XX</b>	<b>NP266XX</b>

Standard color without **XX** = Brown. All other colors add suffix to Catalog No.  
**XX**=Color: 'AL'=Almond; 'BK'=Black; 'GY'=Gray; 'I'=Ivory; 'LA'=Light Almond; 'W'=White.



### Mid-Size, Nylon

	1-Gang	2-Gang	3-Gang	4-Gang
See Color Code	<b>NPJ26XX</b>	<b>NPJ262XX</b>	<b>NPJ263XX</b>	<b>NPJ264XX</b>

Standard color without **XX** = Brown. All other colors add suffix to Catalog No.  
**XX**=Color: 'AL'=Almond; 'BK'=Black; 'GY'=Gray; 'I'=Ivory; 'LA'=Light Almond; 'R'=Red; 'W'=White.

### Snap On

	1-Gang	2-Gang	3-Gang	4-Gang	5-Gang	6-Gang
See Color Code	<b>RCW1XX</b>	<b>RCW2XX</b>	<b>RCW3XX</b>	<b>RCW4XX</b>	<b>RCW5XX</b>	<b>RCW6XX</b>

**XX**=Color: 'AL'=Almond; 'I'=Ivory; 'LA'=Light Almond; 'W'=White.


## Decorator Outlet Frames

Description	Catalog No.
1-Gang Adapter, 0.406" Hole (For use with rotary dimmers or to pull through AV or telephone cable)	<b>NS621XX</b>

### Decorator Frames with:

Single F-Type Coupler Bulkhead, F/F	<b>NS780XX</b>
Duplex F-Type Coupler Bulkhead, F/F	<b>NS782XX</b>
1 Cat. 5e 110 Punch-Down, 1 F-type Coupler Bulkhead, F/F	<b>NS785XX</b>
Blank GFCI Frame, 1-Gang	<b>NS620XX</b>

**XX**=Color: 'AL'=Almond; 'I'=Ivory; 'LA'=Light Almond; 'W'=White.

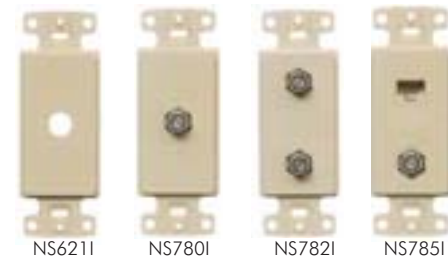

## Molded-In Plates

Description	Catalog No.
1-Gang Plate, Single F-Type Coupler Bulkhead, F/F	<b>NS750XX</b>

**XX**=Color: 'AL'=Almond; 'I'=Ivory; 'LA'=Light Almond; 'W'=White.

1-Gang Plate, Duplex F-Type Coupler Bulkhead, F/F	<b>NS752XX</b>
---	----------------

**XX**=Color: 'AL'=Almond; 'I'=Ivory; 'LA'=Light Almond; 'W'=White.

1-Gang Plate, 1 Cat 5e 110 Punch-Down, 1 RJ-11 Jack (6-position/ 4-conductor), 1 F-Type Coupler Bulkhead, F/F	<b>NS790XX</b>
--	----------------

**XX**=Color: 'AL'=Almond; 'BK'=Black; 'BN'=Brown; 'GY'=Gray; 'I'=Ivory; 'LA'=Light Almond; 'W'=White.



## Telephone Wall Jacks, Thermoplastic


Designed for voice applications, these jacks provide an economical alternative to basic wall mount and performance needs.

Description	Catalog No.
Wall Phone Jack, 6-position/4-conductor (punch-down termination tool included)	<b>NS721XX</b>

Wall Phone Jack, 6-position/4-conductor, Screw Terminations	<b>NS722XX</b>
---	----------------

Wall Phone Jack, 6-position/6-conductor, Screw Terminations	<b>NS725XX</b>
---	----------------

**XX**=Color: 'AL'=Almond; 'I'=Ivory; 'LA'=Light Almond; 'W'=White.



NS721XX



## Telephone Wall Jacks, Stainless Steel

Designed for voice applications, these jacks provide an economical alternative to basic wall mount and performance needs.

Description	Catalog No.
Wall Phone Jack, Quick Connect, 6-position/4-conductor, Stainless Steel (punch-down termination tool included)	<b>NS723SS</b>

Wall Phone Jack, Quick Connect, 6-position/4-conductor, Screw Terminations, Stainless Steel	<b>NS726SS</b>
---	----------------



NS723SS



# netSELECT<sup>®</sup> Multimedia Distribution

## JLOAD<sup>™</sup> Multimedia Outlet



- Exclusive J-LOAD<sup>™</sup> Combines High and Low Voltage into a Single Gang.
- Specialty Delivery Products Deliver Connectivity where Previously Impossible.
- Great Rooms, Kitchens, Labs, and Recreation Areas can all Benefit from These Products.
- Do More in a Single Gang.



RJ620W

### JLOAD<sup>™</sup> Multimedia Outlet, Loaded

Specifically designed to provide power, Category 5e and coaxial in a single gang box. Requires JLOAD<sup>™</sup> Multimedia Box RJ600. Perfect for HDTV and computer use where a combination of power and data are needed. Includes Decorator frame, one Cat. 5e, one F-connector and one power receptacle 125V with voltage divider.

	15A/125V Tamper-Resistant Catalog No.	15A/125V Standard Catalog No.	20A/125V Tamper-Resistant Catalog No.	20A/125V Standard Catalog No.
Color				
Almond	<b>RJ650ALTR</b>	<b>RJ650AL</b>	<b>RJ620ALTR</b>	<b>RJ620AL</b>
Black	<b>RJ650BKTR</b>	<b>RJ650BK</b>	<b>RJ620BKTR</b>	<b>RJ620BK</b>
Gray	<b>RJ650GYTR</b>	<b>RJ650GY</b>	<b>RJ620GYTR</b>	<b>RJ620GY</b>
Ivory	<b>RJ650ITR</b>	<b>RJ650I</b>	<b>RJ620ITR</b>	<b>RJ620I</b>
Lt. Almond	<b>RJ650LATR</b>	<b>RJ650LA</b>	<b>RJ620LATR</b>	<b>RJ620LA</b>
White	<b>RJ650WTR</b>	<b>RJ650W</b>	<b>RJ620WTR</b>	<b>RJ620W</b>



RJ62W

### JLOAD<sup>™</sup> Multimedia Outlet, Unloaded

Includes Decorator frame with two open ports for custom configuration and one power receptacle 125V with voltage divider.

	15A/125V Tamper-Resistant Catalog No.	15A/125V Standard Catalog No.	20A/125V Tamper-Resistant Catalog No.	20A/125V Standard Catalog No.
Color				
Almond	<b>RJ65ALTR</b>	<b>RJ65AL</b>	<b>RJ62ALTR</b>	<b>RJ62AL</b>
Black	<b>RJ65BKTR</b>	<b>RJ65BK</b>	<b>RJ62BKTR</b>	<b>RJ62BK</b>
Gray	<b>RJ65GYTR</b>	<b>RJ65GY</b>	<b>RJ62GYTR</b>	<b>RJ62GY</b>
Ivory	<b>RJ65ITR</b>	<b>RJ65I</b>	<b>RJ62ITR</b>	<b>RJ62I</b>
Lt. Almond	<b>RJ65LATR</b>	<b>RJ65LA</b>	<b>RJ62LATR</b>	<b>RJ62LA</b>
White	<b>RJ65WTR</b>	<b>RJ65W</b>	<b>RJ62WTR</b>	<b>RJ62W</b>



### JLOAD<sup>™</sup> Multimedia Box

3.0 inches deep with seven 1/2-inch knockouts, non-metallic sheathed cable clamps on each side. Screw in mounting to stud.


Material	Catalog No.
Steel	<b>RJ600</b>




## Under Cabinet/Counter Multimedia Distribution



RU100W



RU200SS



Under Cabinet/Counter Boxes provide a convenient, out-of-sight way to distribute power and voice/data. These boxes comply with the NEC<sup>®</sup> for kitchen receptacles, with placement not more than 20 inches above the counter surface. They can also be placed under counter islands, not lower than 15 inches from the surface.

- Available with nylon or metal cover.
- Custom configurable, accepts any decorator style device.
- Mounting hardware included.
- UL Listed E31999 and CSA Certified under cabinet boxes.

### Slim Fit Box

Offers the slimmest, sleekest, most stylish option for low profile, out-of-sight mounting. Devices sold separately.

Material/Color	Catalog No.
Stainless Finish	<b>RU100SS</b>
White Metal	<b>RU100W</b>
White Nylon	<b>RU170W*</b>

\* Steel box with Nylon cover



### GFCI Fit Box

Designed specifically for GFCI or JLOAD<sup>™</sup> accommodation where internal wiring space is needed. Devices sold separately.

Material/Color	Catalog No.
Stainless Finish	<b>RU200SS</b>
White Metal	<b>RU200W</b>
White Nylon	<b>RU270W*</b>

\* Steel box with Nylon cover



NEC<sup>®</sup> is a registered trademark of the National Fire Protection Association (NFPA).

## Floor Boxes for Wood Floors

netSELECT™ Wood Floor Boxes allow for the placement of electrical power or a combination of power and voice/data devices. Boxes easily mount into the floor and are height adjustable (up to ¾ inch) for optimal alignment and fit. UL Listed E31999 and CSA Certified.

### Floor Box

Decorator Duplex Receptacle Floor Box Kit, 15A/125V - NEMA 5-15R. Includes steel box, flange and hinged door cover assembly with duplex receptacle. Available in solid brass or durable powder coat painted finish. Designed for installation in wood floors, mounts to sub floor between joists.

Material/Color	Catalog No.
Solid Brass	<b>RF515BR</b>
Stainless Finish	<b>RF515SS</b>
Almond	<b>RF515AL</b>
Black	<b>RF515BK</b>
Chestnut Brown	<b>RF515BN</b>



RF506BR

### Flange and Hinged Door Cover Assembly

15A/125V - NEMA 5-15R. Includes duplex receptacle, neoprene gaskets, for use with steel box RF500.

Material/Color	Catalog No.
Solid Brass	<b>RF506BR</b>
Stainless Finish	<b>RF506SS</b>
Almond	<b>RF506AL</b>
Black	<b>RF506BK</b>
Chestnut Brown	<b>RF506BN</b>



RF515BR



RF507BR

### Adjustable Floor Box, 3" Deep

Three ½-inch knockouts: One on bottom, one on each side, non-metallic sheathed cable clamps on each side.

Material/Color	Catalog No.
Steel	<b>RF500</b>



RF500

### Hinged Door Cover Only

Replacement door for RF515 and RF506 series.

Material/Color	Catalog No.
Solid Brass	<b>RF507BR</b>
Stainless Finish	<b>RF507SS</b>
Almond	<b>RF507AL</b>
Black	<b>RF507BK</b>
Chestnut Brown	<b>RF507BN</b>



RF151R

### Drop In Floor Box

15A/125V - NEMA 5-15R. Mounts in 2½ inch hole opening. Includes solid brass cover, single tamper-resistant receptacle, optional device mounts for two (2) voice/data video ports. Suitable for feed through circuitry. Impact resistant box.

Material/Color	Catalog No.
Solid Brass	<b>RF151R</b>



## Floor Boxes for Concrete Floors

After the box has been secured in concrete, cut for height, apply PVC glue and push the cover assembly into the box. No fasteners or adjustment screws required.

- 4 inch minimum concrete pour.
- Recessed GFCI/Decorator opening.
- Self height and leveling ring, no adjustments.
- UL Listed E92074 Floor Box.

### PVC Floor Box with Concrete Protective Cover

Accepts ¾ in. and 1.0 in. schedule 40 and schedule 80 PVC conduit. Includes round box (4 7/8 in. diameter x 6.0 in. deep), four reducers, closure plugs, and concrete cover with locator flag.

Material/Color	Catalog No.
Gray	<b>RF400</b>



RF400

### Flange and Hinged Door Cover Assembly

Includes duplex receptacle, gasket, floor leveling PVC ring, high impact and chemically resistant nylon. Factory pre-assembled for easy drop-in installation.

Rating	Material/Color	Catalog No.
15A 125V	Solid Brass	<b>RF406BR</b>
NEMA 5-15R	Almond	<b>RF406AL</b>
NEMA 5-15R	Black	<b>RF406BK</b>



RF406BK



RF407BK

### Hinged Replacement Door Cover, Nylon

Includes neoprene gasket to seal plug openings. Replacement cover for RF406 series.

Material/Color	Catalog No.
Solid Brass	<b>RF407BR</b>
Almond	<b>RF407AL</b>
Black	<b>RF407BK</b>



RF408

### Low Voltage Divider

For use in PVC box RF400 when JLOAD™ Multimedia Outlet is used.

Material/Color	Catalog No.
Gray	<b>RF408</b>

